


PrevaLED Flat AC DA

Light Engines e Módulos de sobrepor e embutir

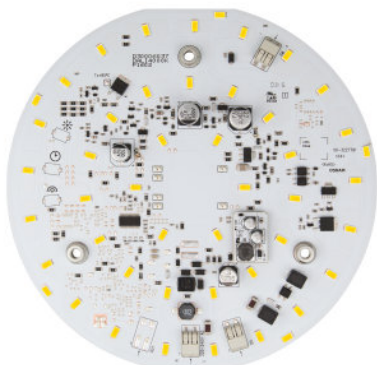

Características do produto

- Gama de regulação (DALI): 1...100 %
- Dimensões da versão DALI iguais à versão on/off
- Concebido para luminárias de parede e teto com distribuição de luz difusa
- Substituição LED Low-cost para luminárias de teto e parede com CFL
- Driver integrado na placa LED
- Available diameter: 170 mm, 240 mm, 335 mm, 415 mm
- Disponível com temperatura de cor: 3,000 K ou 4,000 K
- Available with luminous flux: 1,500 lm, 2,500 lm, 4,000 lm, 5,000 lm
- Duração (L70/B50): 50,000 h (temperatura no $T_c = 80\text{ }^{\circ}\text{C}$)

Benefícios do produto

- Elevada fiabilidade
- Fácil de usar
- Design otimizado para uma gestão térmica simples
- Permite o design de luminárias elegantes e eficientes
- Alta qualidade de luz devido à baixa modulação
- 5 anos de garantia

Áreas de aplicação

- Corredores
- Escadarias
- Aterragens
- Corredores
- Iluminação de emergência para blocos autónomos
- Luminárias para iluminação de emergência com baterias centralizadas de acordo com IEC 60598-2-22

Ficha técnica da família de produto

Informações sobre aplicações

Para obter mais informações sobre aplicações e gráficos acesse a ficha técnica do produto.

Texto ficha técnica

- Installation by qualified electrician only.
- Please see the relevant application guides and instructions sheets for more detailed safety and mounting information. Additional information is available on request.
- Complies with IEC/EN 62031
- Complies with IEC/EN 61547
- Complies with IEC/EN 61000-3-2
- Complies with EN 55015, CISPR 15
- Complies with IEC/EN 62717
- Electrical contact is achieved with the contact cables or the terminals of the module. Please refer to the technical data for maximum number of LED modules that can be operated on one control gear.
- Conducting paths on the circuit board must not be damaged or destroyed during installation.
- The LED module itself and all its components must not be stressed mechanically.
- For optimal cooling a thermal interface material should be applied between LED module and heat sink.
- The module must not be attached to wood or other flammable materials.
- Protect against splashes!
- The module, as manufactured, has no inherent protection against corrosion. It is the user's responsibility to provide suitable protection against corrosive agents, such as moisture, condensation and other harmful elements.
- For efficiency measurement, the product shall be set to a DALI dimming level of 100% by using Tuner4TRONIC. Refer to www.tuner4tronic.com.
- The product implemented control components are not designed for removal.

Vendas e suporte técnico

Vendas e suporte técnico www.osram.br

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Referências / Links

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit [https://](https://www.inventronics-light.com/multilevel-guarantees)

- ▶ www.inventronics-light.com/multilevel-guarantees

Sujeito a alteração sem prévio aviso. Sempre utilize a versão mais recente.